

PERFORMANCE • PRICE • PARTNERING • PRODUCT  
PARTNERING • PROFESSIONAL SUPPORT 24/7 • PRICE

# High Velocity® Touch Free In-Bay Vehicle Wash Systems



The Washworld® High Velocity® Touch Free In-Bay Automatic Wash is truly the best of all worlds. Cutting-edge technology and proven performance, all at a price you simply cannot beat. With dozens of standard features, premium components, factory testing and 24/7 technical support, Washworld leads the way.



1755 E. Matthew Drive | De Pere, WI 54115

920.338.9278 | 888.315.7253

[www.washworldinc.com](http://www.washworldinc.com)

## STANDARD FEATURES


- Touch Free Design
- Wash View® Controller w/ Exclusive Wash View Remote Software
- All Stainless Steel Wall Mounts, Rails, Carriage & Trolley Assemblies
- Direct Drive Utilizing Variable Frequency Drives
- Pumping Station All Stainless Steel w/ Either CAT or General Pump
- Deluxe Image Package
- ETL Approved
- Resource Conservation System™
- Two Step Presoak— Standard
- Modem w/ Fault Paging
- High Pressure Under Carriage and Rocker Blasters
- Direct Feed Solutions System
- Triple Pass Technology™
- Washes Dual Wheel Trucks — Standard
- Integrated Security Systems

## OPTIONS

- Flex-Pass System
- VS² Vehicle Sizing System
- Deluxe Door Controls
- Drying Systems
- Free Standing Frame
- Spot Free (RO) Systems
- Cold Climate Package
- Tri-Color Foam
- Reclaim System Adapter
- Directional, Service Confirmation and Instructional Signage
- Custom Graphics

© 2007 Washworld Inc.

## High Velocity® Touch Free In-Bay Vehicle Wash Systems

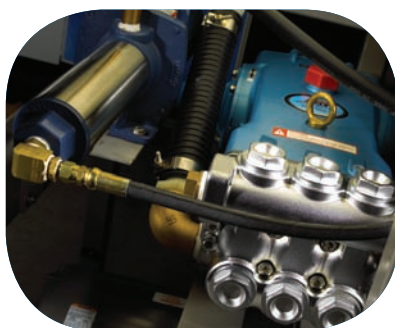

### SPECIFICATIONS

Building Dimensions (*Does not include dryer, obstructions, etc.*)

<b>Height</b>	Wall Mount . . . . .	10'-4" minimum ( <i>custom</i> ) 11'-4" standard
	Floor Mount . . . . .	11'-4" standard
<b>Width</b>	Wall Mount . . . . .	13'-4" minimum to 18'-0 maximum
	Floor Mount . . . . .	14'-0" minimum ( <i>no maximum</i> )
<b>Length</b>	Wall Mount . . . . .	24'-10" minimum w/optional 24' Rails
	Floor Mount . . . . .	26'-10" minimum w/ standard 26' Rails
	On Board Dryer . . . . .	29'- 6" minimum w/ optional 28' 8" Rails

### HIGH VELOCITY UTILITY REQUIREMENTS

Utility Requirements (*Does not include dryer, RO, etc.*)

<b>Air</b>	11 CFM @ 100 PSI minimum ( <i>with optional Triple Foam</i> )
<b>Water</b>	25 GPM @ 35 PSI minimum at pump station
<b>Electrical</b>	(all voltages 3 phase, 4 wire ( <i>neutral and ground</i> ))

<u>Voltage</u>	<u>UCC Cabinet</u>	<u>High Velocity® Pump Station</u>	<u>Optional Cold Climate Package</u>
208	23 Amps	73 Amps	14 Amps
230	20 Amps	62 Amps	12 Amps
460	n/a	31 Amps	n/a

*Note: Specifications Subject to Change Without Notice.*



1755 E. Matthew Drive | DePere, WI 54115  
 920.338.9278 | 888.315.7253  
[www.washworldinc.com](http://www.washworldinc.com)